

UTILITY PATENT APPLICATION  
UNDER 37 CFR 1.53 (b)

HONORABLE COMMISSIONER OF  
PATENTS AND TRADEMARKS  
Washington D.C. 20231

Case Docket No. 041-2063

Sir:

Transmitted herewith for filing is the patent application of:

INVENTOR: Kensuke MARUYA et al.  
FOR: CLIENT/SERVER MULTIMEDIA PRESENTATION SYSTEM

Enclosed are:

- ☒ 34 pages of specification, claims, abstract
- ☒ Declaration & Power of Attorney
- ☒ Priority Claimed
- ☒ Certified copy of Japan 10-180269
- ☒ 15 sheets of formal drawing
- ☒ An assignment of the invention to Matsushita Electric Industrial Co., Ltd.  
and the assignment recordation fee
- ☒ Return Receipt Postcard
- ☒ Information Disclosure Statement, Form PTO-1449
- ☒ Copies of IDS Citations
- ☐

The filing fee has been calculated as shown below:

(1) FOR	(2) NO. FILED	(3) NO. EXTRA	(4) RATE	(5) AMOUNT
TOTAL CLAIMS	34	-20	14	x \$18.00 = \$252.00
INDEPENDENT CLAIMS	9	-3	6	x \$78.00 = 468.00

MULTIPLE DEPENDENT  
CLAIM(S) (If applicable) + \$260.00 = 00.00

BASIC FEE \$ 760.00

Total of above calculations= \$1,480.00

[X] Assignment & Recording Fee \$40.00

TOTAL FEE \$1,520.00

[X] Check in the amount of \$1,520.00 is attached hereto.

[ ] Please charge my Deposit Account No. 07-1337 in the amount of \$\_\_\_\_. A duplicate copy of this sheet is enclosed.

[X] The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 07-1337. A duplicate copy is enclosed.

Docket No.: 041-2063


[X] Any additional filing fees required under 37 CFR 1.16.

[X] The Commissioner is hereby authorized to charge payment of following fees during the pendency of this application or credit any overpayment to Deposit Account No. 07-1337. A duplicate copy of this sheet is enclosed.

[X] Any patent application processing fees under 37 CFR 1.17.

[X] Any filing fees under 37 CFR 1.16 for presentation of extra claims.

LOWE HAUPTMAN GOPSTEIN  
GILMAN & BERNER, LLP



Israel Gopstein  
Registration No. 27,333

1700 Diagonal Road, Suite 310  
Alexandria, Virginia 22314  
(703) 684-1111 IG:tmf  
Facsimile: 703-518-5499  
**Date:** June 21, 1999

## CLIENT/SERVER MULTIMEDIA PRESENTATION SYSTEM

BACKGROUND OF THE INVENTION

## 1. Field of the Invention

The invention relates to a client/server system in which a client terminal connected with a server through a transmission path of a limited bandwidth plays a multimedia program which is stored in the server and is comprised of multimedia objects such as moving pictures, still pictures, sounds and texts while reading the objects in real time from the server.

## 2. Description of the Prior Art

In such a system, a user of a client terminal is permitted to select one of a plurality of programs and to enter commands such as a play, a stop, a head search, a jump forward and a jump backward for the selected program. During a play operation, the server reads data of a specified program stored in a storage device and transmits the read data to the client terminal. Then, the client terminal displays the received data. However, once one of the stop, the head search, a jump forward and a jump backward command is executed, no data is transmitted from the server to the client terminal till the play command is executed.

The transmission rate of the transmission path between the server and each terminal is limited, i.e., the quantity of data transmitted for a certain period of time is limited. For this reason, in order to enable each client terminal to play a program whose data is stored in the server while having the program data transmitted from the server, video data of each program is stored in the server such that the bit rate (or the quantity of data reproduced or played per second) of video data of each program does not exceed the transmission rate of the transmission paths.

If the transmission paths between the server and the client terminals are considerably low as in case of ordinary telephone lines, it is necessary to reduce the frame rate, the resolution and/or the frame size, which degrades the picture quality of video objects.

5 It is an object of the invention to provide a video-on-demand system that enhances the quality of image by using the period of a play stoppage.

### SUMMARY OF THE INVENTION

According to an aspect of the invention, a method of presenting, at a client terminal, a video program stored in a server linked with the client terminal via transmission path of a limited band width is provided. Each frame of the video program comprises a basic data portion and at least one level of quality supplement data portions. In the method, in response to one of play control commands from a user, the client terminal determines a start (or play) position in the video program according to the issued play control command. The play control commands includes a play, a stop, a head search, a jump forward and a jump backward command. In response to the issued play command, the terminal obtains and uses the basic data portions for playing the video program. In response to the stop command, the terminal obtains and uses the at least one level of quality supplement data portions of a last displayed frame for displaying a quality-enhanced version of the last displayed frame.

According to another aspect of the invention, a method of presenting, at a client terminal, a multimedia program stored in a server is provided. The multimedia program includes a video object. Each frame of the video object comprises a basic data portion and at least one level of detailed data portions. In this method, in response to one of play control commands from a user, the

terminal determines a time count in the multimedia program according to the issued play control command. The play control commands include a play, a stop, a head search, a jump forward and a jump backward command. In response to one of the head search, the jump forward and the jump backward commands issued during a stop period, the terminal determines whether there is a video object to be displayed at the time count in the multimedia program. In the event there is the video object to be displayed at the time count in the multimedia program, the terminal obtains at least one level of quality supplement data portions for a first frame to be displayed in a next play operation for displaying a quality-enhanced version of the first frame to be displayed.

If a stop command is issued, a test is responsively made to see if there is multimedia objects which are other than video objects and each comprise basic data and quality supplement data and which are to be displayed at said time count in said multimedia program. If so, then for each of said found multimedia objects, the terminal obtains the quality supplement data for displaying a quality-enhanced version of each object.

Alternatively, in response to the stop command, a test is made to see if there is (or are) multimedia objects which are other than video objects and each comprise basic data and quality supplement data and which are to be displayed later. If so, the terminal tries to obtain the basic data for as many of the found multimedia objects as possible in advance.

According to another aspect of the invention, a terminal for presenting a video program stored in a remote server connected therewith via band-limited transmission path is provided. Each frame of the video program comprises a basic data portion and at least one level of quality supplement data portions. The terminal comprises means, responsive to one of play control

commands from a user, for determining a start position in the video program according to the issued play control command. The play control command includes a play, a stop, a head search, a jump forward and a jump backward command. The terminal includes means, responsive to the play command from the user, for obtaining and using said basic data portions for playing said video program; and means, responsive to the stop command, for obtaining and using at least one level of quality supplement data portions of a last displayed frame for displaying a quality-enhanced version of the last displayed frame.

#### BRIEF DESCRIPTION OF THE DRAWING

The features and advantages of the present invention will be apparent from the following description of an exemplary embodiment of the invention and the accompanying drawing, in which:

Fig. 1 is a schematic block diagram showing an arrangement of a multimedia-on-demand system that can embody the present invention in various forms;

Fig. 2 is a schematic diagram showing the contents of the ROM 52 and the RAM;

Fig. 3 is a diagram showing exemplary presentation control buttons included in the control switches 70 of Fig. 1;

Fig. 4 is a table for describing how the scenario time manager 101 sets the value Ct of the scenario time register 501 in response to the executed presentation control command;

Fig. 5 is a diagram conceptually showing a data structure of a video object stored in the mass storage 20 of Fig. 1;

Fig. 6 is a flowchart showing an exemplary operation of an interrupt subroutine called from a main program in response to an interrupt caused by

a pressing of one of the presentation control buttons of Fig. 3 after one of the available programs stored in the mass storage 20 is specified by the user at the client terminal 3;

Figs. 7 and 8 are diagrams conceptually showing arrangements of a first and a second exemplary mass storage 20a and 20b using tape storage devices;

Figs. 9 and 10 are diagrams showing a first storing scheme 20c and a second storing scheme 20d of storing a video object on a disc storage device;

Fig. 11 is a diagram showing an address table used in the second storing scheme 20d of Fig. 10;

Fig. 12 is a diagram showing a third storing scheme 20e of storing a video object on a disc storage device;

Fig. 13 is a diagram showing a data structure obtained when a progressive JPEG video object is stored in the third storing scheme 20e as shown in Fig. 12;

Fig. 14 is a diagram conceptually showing the H. 263 video format;

Fig. 15 is a schematic block diagram showing an exemplary arrangement of a video decoder 600 which is included in the video & audio decoder 60 of Fig. 1 and which is adapted to decode a video object of the H. 263 format as shown in Fig. 14;

Fig. 16 is a diagram showing an exemplary scenario data table of a multimedia program available in a multimedia-on-demand system according to a second illustrative embodiment of the invention:

Fig. 17 is a diagram showing an exemplary active object table created from the scenario data table of Fig. 16;

Fig. 18 is a flowchart showing an operation of an interrupt subroutine called from a main program in response to an interrupt caused by the user at

the client terminal 3 pressing one of the presentation control buttons of Fig. 3 after specifying one of the available multimedia programs stored in the mass storage 20;

Fig. 19 is a diagram showing various variable-quality objects used in an exemplary multimedia program available in the inventive multimedia-on-demand system;

Fig. 20 is a diagram showing how the multimedia objects of Fig. 19 are presented in the exemplary multimedia program;

Fig. 21 is a diagram showing a way of transmitting the multimedia objects to present the objects as shown in Fig. 20;

Fig. 22 is a flowchart showing an operation of an interrupt subroutine called in response to a pressing of one of the presentation control buttons of Fig. 3 according to the third embodiment of the invention;

Fig. 23 is a diagram showing an exemplary structure of a scenario data table according to the third embodiment of the invention; and

Fig. 24 is a diagram showing an exemplary arrangement of a load flag storage location.

Throughout the drawing, the same elements when shown in more than one figure are designated by the same reference numerals.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 is a schematic block diagram showing an arrangement of a multimedia-on-demand system that can embody the present invention in various forms. In Fig. 1, double lines indicate bus lines. The multimedia-on-demand system comprises a server 1 that stores and serves multimedia programs, at least one client terminal 3 that plays one of the multimedia programs, and a network 2 for connecting the server 1 and the client



terminals 3.

The server 1 comprises a controller 10, a mass storage 20 for storing the multimedia programs, an object data transmitter 30 for transmitting object data constituting a multimedia program and a control data

communication interface (IF) 40 for communicating control data with each client terminal 3. The client terminal 3 comprises an object data receiver 35 for receiving object data transmitted from the server 1; a control data communication IF 40 for communicating the control data with the server 1; a controller 50 for controlling the operation of the terminal 3; a video and audio decoder 60 for decoding video and audio object data into video and audio output signals; a video output portion 80 for providing a video output according to the video signal from the decoder 60 and the image data from the controller 50; an audio output portion 90 for providing an audio output according to the audio signal from the decoder 60 and the audio data from the controller 50; and control switches 70 that permit the user to specify a desired one of the multimedia programs stored in the mass storage 20 and to enter a play, stop, jump forward, jump backward and head search commands. The controller 50 includes a read only memory (ROM) 52 and a random access memory (RAM) 54. The elements 35, 40, 50, 60, 70, 80 and 90 are interconnected by bus lines 51.

Fig. 2 is a schematic diagram showing the contents of the ROM 52 and the RAM. In Fig. 1, the ROM 52 stores programs 100 necessary for the operation of the controller 50. The RAM 54 stores various data 500 necessary for the operation of the controller 50. The programs 100 include a scenario time manager 101, which sets the value (Ct) of a scenario time register 501 in the RAM 54 in a play operation of a multimedia program such that the current scenario time or the current position in the multimedia program is

given by  $T * Ct$ , where  $T$  is a frame period of the video objects.

The control switches 70 include presentation control buttons for head search (HS), jump forward (JF), play, stop, jump backward (JB) operations as shown in Fig. 3. Fig. 4 shows a table for describing how the scenario time

5 manager 101 sets the value  $Ct$  of the scenario time register 501 in response to the executed presentation control command. In Fig. 4, if a play command is issued, the scenario time manger 101 increments the value  $Ct$  of the scenario time register 501 for every frame period  $T$  as long as the play command is active. If a jump forward, a jump backward or a head search is issued, the  
10 scenario time manger 101 sets the scenario time register value  $Ct$  to  $Ct + Cj$ ,  $Ct - Cj$  or 0, respectively.  $Cj$  is a predetermined jump distance for use in the JF and JB operations. In case of a stop command, the scenario time manger 101 does nothing, i.e., the value  $Ct$  remains unchanged.

Each of the multimedia programs generally comprises video objects, still picture objects, audio objects and/or text objects.

#### 15 Embodiment 1

For the sake of simplicity, it is assumed in a first illustrative embodiment of the invention that the multimedia-on-demand system of Fig. 1 is a video-on-demand system, i.e., each of the programs available at each  
20 client comprises a video object.

It is also assumed that the data of the video object stored in the mass storage 20 has a structure as shown in Fig. 5. Data of each frame of the video object (hereinafter referred to as "each frame data  $Ff$ ") comprises a basic image data portion  $F0f$  and at least one level (e.g., 4 levels in Fig. 5) of quality  
25 supplement data portions  $F1f$ ,  $F2f$ ,  $F3f$  and so on. ( $f = 1, 2, \dots, N$ , where  $N$  is the total number of frames of a video object) The suffix  $f$  is the frame number of the frame. Zero "0" following "F" in a label given to each data portion

indicates that the data portion is the basic image data. A non-zero numeral (1, 2, 3...) following "F" in a label given to each data portion indicates that the data portion is quality supplement data of the level specified by the non-zero numeral. The image quality of the f-th frame becomes better to the best by using not only basic image data F0f but also quality supplement data F1f, F2f, F3f and so on. In the following description, it is assumed that there are 4 levels of quality supplement data portions F1f, F2f, F3f and F4f for each frame.

In the first illustrative embodiment, the client terminal 3 uses only the basic image data F0, F0<sub>2</sub>, ..., F0<sub>N</sub> (hereinafter referred, en bloc, to like "F0") in a play operation. However, if the terminal 3 detects a stop command in an arbitrary state of operations or detects one of head search (HS), jump forward (JF) and jump backward (JB) commands during a stop state, the terminal 3 performs a image quality enhancing operation on entering a stop state or just after the operation of the detected command by obtaining the quality supplement data F1f, F2f, F3f and F4f for the last displayed frame from the server 1.

Since the presented program is a video object in this example, the scenario time register 501 contains the frame number f, that is, Ct = f.

Fig. 6 is a flowchart showing an operation executed by the controller 50 of the client terminal 3 under the control of an interrupt subroutine called from a main program in response to an interrupt caused by the user at the client terminal 3 pressing one of the presentation control buttons of Fig. 3 after specifying one of the available programs stored in the mass storage 20. In Fig. 6, the controller 50 first make s a test in step 122 to see if a play operation flag (not shown) is logical "1" or indicates that the terminal is in one of the play modes: i.e., a (normal) play, a jump forward (JF) play, a jump

backward (JB) play, and a head search (HS) play (or a JB play to the beginning of the program). If so (which means that the terminal 3 is in a play mode), a test is made in step 124 to see which presentation control command has been issued.

5 If JB, JF or HS command is detected in step 124, then the controller 50 executes a JB play step 126, a JF play step 128 or a HS play step 130, respectively, in a well known manner; and returns to the main program that has invoked this subroutine 120 to resume the play operation that was being executed when this routine 120 was invoked. If the stop command is detected  
10 in step 124, the controller 50 resets the play operation flag, i.e., sets the flag logical "0" in step 136; ceases the play mode in step 137; performs an image quality enhancing operation for the frame identified by the value Ct (= f in this example) of the scenario time register 501 in step 139; and ends the operation 120.

15 Specifically, in step 139, the controller 50 transmits an image quality enhancing instruction and the register 501 value f to the server 1. The controller 10 of the server 1 responsively reads the quality supplement data F1f, F2f, F3f and F4f for the frame identified by the value f from the mass storage 20 and transmits them to the requesting client terminal 3. The  
20 terminal 3 responsively adding the received quality supplement data F1f, F2f, F3f and F4f to the basic image data F0f into a high quality frame data. By doing this, the quality of the currently displayed frame becomes better gradually with the receptions of the quality supplement data F1f, F2f, F3f and F4f. After step 146, the controller 50 ends the operation 120.

25 If the play operation flag is not logical "1" (which means that the terminal 3 is in a stop mode), a test is made in step 125 to see which presentation control command has been issued.

If a play command is detected in step 125, the controller 50 sets the play operation flag logical "1" in step 132; and plays (or reproduces) the current program (the program the user has specified before the controller 50 has entered the operation 120) from the frame identified by the register 501 value Ct in steps 150, 152 and 154. Specifically, the controller 50 presents the frame of the register 501 value Ct in step 150 and checks the value Ct to see if the register value Ct has reached a preset end value in step 152. If not, the controller 50 increments the value Ct in step 154 and goes back to step 150. If the register 501 value Ct has reached the preset end value in step 152, then the controller 50 returns to the main program that has invoked this subroutine 120.

If JB, JF or HS command is detected in step 125, then the controller 50 sets the register 501 value Ct to Ct-Cj, Ct+Cj or 0 in a JB step 140, a JF step 142 or a HS step 144, respectively, as shown in Fig. 4. After step 140, 142 or 144, the controller 50 performs an image quality enhancing operation for the frame identified by the scenario time register 501 value before the execution of step 140, 142 or 144 in step 146. This causes the quality of the currently displayed frame to get better gradually with the receptions of the quality supplement data F1f, F2f, F3f and F4f as described above. The controller 50 ends the operation 120 after step 146.

Some examples of the mass storage 20

Figs. 7 and 8 are diagrams conceptually showing arrangements of a first and a second exemplary mass storage 20a and 20b using tape storage devices. The storage 20a comprises five tape storage devices 211 through 215. The tape device 211 stores the basic image data F0. The four tape devices 212 through 215 store the four level quality supplement data F1 through F4, respectively. The basic image data F0f and the corresponding quality

supplement data F1f, F2f, F3f and F4f for each frame are recorded on the same tape positions of the five tapes. The five tape storage devices are so arranged that the five reels are independently rotated only in case of image quality enhancing operation and are synchronously rotated otherwise. In an image quality enhancing operation, the tape storage devices 212 through 215 for the quality supplement data F1 through F4 are sequentially read one by one.

The storage 20b comprises two tape storage devices 217 and 218. The tape device 217 stores the basic image data F0. The tape device 218 stores the four level quality supplement data F1 through F4. The quality supplement data F1f, F2f, F3f and F4f for each frame are recorded on the tape position of the tape 218 which corresponds to the position of the tape 217 on which the basic image data F0f for the frame is recorded when the tapes 217 and 218 are rotated synchronously. The two tape devices 217 and 218 are so arranged that the two reels are independently rotated only in case of image quality enhancing operation and are synchronously rotated otherwise. In an image quality enhancing operation, the tape storage device 218 portion for the quality supplement data F1f through F4f are sequentially read.

Figs. 9 and 10 show a first storing scheme 20c and a second storing scheme 20d of storing a video object on the mass storage 20. The mass storage 20 may be any suitable disc storage device such as a hard disc, various optical discs, etc. The basic image data F0 and the quality supplement data (QSD) F1, F2,... are stored in two different areas: a F0 area and a QSD area on the third mass storage media.

In the first storing scheme 20c of Fig. 9, it is assumed that the quantity of the quality supplement data (QSD) F1f, F2f, F3f and F4f for each frame is M times the data quantity of the basic image data F0f for the frame,

where  $M$  is a positive constant. Then, if the first data of the basic image data  $F0f$  is  $(N+1)$ -th byte in the  $F0$  area, then in order to obtain the quality supplement data  $F1f$ ,  $F2f$ ,  $F3f$  and  $F4f$ , the controller 40 has only to read the data of  $D * M$  bytes from the  $(N * M + 1)$ -th byte in the QSD area.  $D$  is the data size of the basic image data for each frame.

In the second storing scheme 20d of Fig. 10, the basic image data  $F0f$  and the total quality supplement data  $F1f + F2f + F3f + F4f$  may have arbitrary sizes. The start address of the total quality supplement data for an  $f$ -th frame in the QSD area is assumed to be  $Af$ . In order to know the quality supplement data address  $Af$  from the frame number  $f$ , the controller 10 uses an address table of Fig. 11. The address table of Fig. 11 comprises a frame number ( $f$ ) field and a field of QSD address ( $Af$ ) for the frame number ( $f$ ).

Fig. 12 shows a third storing scheme 20e of storing a video object on the mass storage 20. The mass storage 20 preferably comprises a suitable disc storage device such as a hard disc, various optical discs, etc. In this storing scheme 20e, the basic image data  $F0f$  and the quality supplement data  $QSDf$  ( $= F1f + F2f + \dots$ ) are stored in a same area with the latter just following the former in a manner like  $F0_{t-1}$ ,  $QSD_{t-1}$ ,  $F0_t$ ,  $QSD_t$ ,  $F0_{t+1}$ ,  $QSD_{t+1}$  and so on. In this case, in normal play step 150 of Fig. 6, the controller 10 reads only the basic image data skipping the quality supplement data as shown by arrows above the strip area representative of the stored video data in Fig. 12. In the image quality enhancing operation in step 146, the controller 10 reads the quality supplement data  $QSD_t$  for the frame identified by the register 501 value as shown by an arrow below the strip area representative of the stored video data in Fig. 12.

#### Progressive JPEG Format

The invention is applicable to video data of formats in which some of

the frames are described by using differential data between frames: e.g., the progressive JPEG format, the H. 263 format, MPEG-1 format and the MPEG-2 format. Fig. 13 is a diagram showing a data structure obtained when a progressive JPEG video object is stored in the third storing scheme 20e as shown in Fig. 12. In Fig. 13, the basic image data F0f for each frame comprises a header F0Hf and a basic image data portion F0Df. The quality supplement data QSDf comprises a first level differential data F1f, a second level differential data F2f, ..., and an L-th level differential data FLf.

In case of the progressive JPEG format, in normal play step 150 of Fig. 6, the controller 10 reads only the header F0Hf and the basic image data F0Df skipping the quality supplement data QSDf (=F1f, F2f, ..., and FLf) for each frame f. In the image quality enhancing operation in step 146, the controller 10 reads the quality supplement data QSDf for the frame identified by the register 501 value.

It is noted that the controller 50 passes the frame data to be displayed to the video & audio decoder 60 of Fig. 1 in playing operations of steps 126, 128, 130 and 150. In case of the progressive JPEG format, the video & audio decoder 60 includes a JPEG decoder.

#### H. 263 Format

Fig. 14 is a diagram conceptually showing the H. 263 video format. In Fig. 14, an H. 263 video data comprises basic image data 210 for use in a play operation and quality supplement data 220 for use in a quality enhancing operation. If the frame data for the basic image data are expressed as  $F0_0$ ,  $F0_1$ ,  $F0_2$ , ...,  $F0_g$ , ..., and  $F0_{3N+2}$  (g is a frame number), then the frame data can be expressed as  $\{F0_{3f}, F0_{3f+1}, F0_{3f+2}; f = 0, 1, \dots, N\}$ . In this case, the basic image frames identified by  $F0_{3f}$  are intra-coded frames that can be decoded alone without the need of data of any other frame. On the other hand, the basic



image frames identified by  $F0_{3f+1}$  and  $F0_{3f+2}$  are first and second differences, in the time direction, from the basic image data  $F0_{3f}$  which needs frame  $F0_{3f}$  data for decoding. The first and second differences are written as TIME

DIRECTION DIF 1 and 2, respectively in Fig. 14. The quality supplement

data for the frame  $3f$  comprises first, second and third differences, in the quality direction, from the basic image data  $F0_{3f}$ , which differences are referred to as "QUALITY DIFs 1, 2 and 3" and labeled " $F1_{3f}$ ", " $F2_{3f}$ " and " $F3_{3f}$ ", respectively. In a similarly manner, the quality supplement data for the frame  $3f+1$  comprises QUALITY DIFs 1, 2 and 3 from the basic image data  $F0_{3f+1}$  which differences are labeled " $F1_{3f+1}$ ", " $F2_{3f+1}$ " and " $F3_{3f+1}$ ", respectively. Also, the quality supplement data for the frame  $3f+2$  comprises QUALITY DIFs 1, 2 and 3 from the basic image data  $F0_{3f+2}$  which differences are labeled " $F1_{3f+2}$ ", " $F2_{3f+2}$ " and " $F3_{3f+2}$ ", respectively.

Fig. 15 is a schematic block diagram showing an exemplary arrangement of a video decoder 600 which is included in the video & audio decoder 60 of Fig. 1 and which is adapted to decode a video object of the H. 263 format as shown in Fig. 14. In Fig. 15, the video decoder 600 comprises a local controller 602 for controlling the operation of the decoder 600; a time-based H. 263 decoder 604; an adder 606; a frame memory 608 for storing a I-coded image data  $F0_{3f}$ ; a memory interface 610 for the memory 608; a quality-enhancing H. 263 decoder 612 for decoding quality supplement data  $F1g$ ,  $F2g$  and  $F3g$  to provide a quality-enhanced frame data  $F0g+F1g+F2g+F3g$ ; and a previous frame memory for quality enhancement.

The received video data is passed to the video & audio decoder 60 and to the video decoder 600 or the local controller 602 through the bus lines 51. If the received video data is basic image data  $F0g$ , then the local controller 602 passes the data  $F0g$  to the time-based H. 263 decoder 604. If the received video

data is quality supplement data F1g, F2g or F3g, then the local controller 602 passes the data F1g, F2g or F3g to the quality-enhancing H. 263 decoder 612.

The local controller 602 supplies a control signal 602a to a memory interface 610 control input 610c. The control signal 602a controls the memory interface 610 such that the data on the interface 610 data input terminal 610a is stored in the memory 608 if the received video data is I-coded image data, i.e.,  $g = 3f$ . Thus, if the received video data is  $F0_{3f}$ , the decoded video data  $[F0_{3d}]$  is stored in the frame memory 608, where  $[A]$  represents a decoded version of data A.

The control signal 602a also controls the memory interface 610 such that the data stored in the frame memory 608, i.e., the decoded video data  $[F0_{3d}]$  is read out to a memory interface 610 data output terminal 610b if the received video data is not I-coded image data, i.e.,  $g \neq 3f$ . Thus, if the received video data is  $F0_{3f+1}$  or  $F0_{3f+2}$ , the decoded video data  $[F0_{3f+1}]$  or  $[F0_{3f+2}]$  is added by the adder 606 to the decoded video data  $[F0_{3d}]$  read from the memory 608 to yield the added decoded video data  $[F0_{3d}] + [F0_{3f+1}]$  or  $[F0_{3d}] + [F0_{3f+2}]$ , respectively, which is supplied to the video output portion 80 and the previous frame memory 614.

To the previous frame memory 614, there are also supplied the decoded video data from the quality-enhancing H. 263 decoder 612. The H. 263 decoder 612 decodes the quality supplement data F1g, F2g or F3g from the local controller 602, and adds the decoded data  $[F1g]$ ,  $[F2g]$  or  $[F3g]$  to the data from the previous frame memory 614 to provide the quality enhanced frame data to the video output portion 80.

It is noted that since the video decoder 600 has respective previous frame memories 608 and 614 and respective H. 263 decoders 604 and 612 for a decoding in the time axis direction and a decoding in the quality axis direction,

it is possible to store data decoded in the time axis direction in both of the previous frame memory 608 and 614 and to store data decoded in the quality axis direction only in the memory 614 for the quality axis direction. This reason, even if quality supplement data for a frame data F0g has been decoded, it is possible to resume the play of video data from the frame data F0g.

Though the above-described video decoder 600 has used two H. 263 decoders, an equivalent video decoder may be implemented by using a single decoder.

A video decoder that decodes a video object of a format using a correlation between frames not only in the time axis direction but also in the quality axis direction has been described in conjunction with the H. 263 video format. However, such a video decoder can be realized for other such video format as MPEG format by replacing the H. 263 decoder(s) with a corresponding video decoder such as an MPEG decoder.

Though the above-described embodiments has dealt with a single media program, i.e., a video object, the following embodiment deals with a multimedia program.

## Embodiment II

A multimedia-on-demand system according to a second illustrative embodiment of the invention has a feature of enhancing the picture quality of the first frame to be displayed after the execution of a stop command or the execution of a JF, JB or HS command issued during a stop state by transmitting quality supplement data from the server 1.

Fig. 16 is a diagram showing an exemplary scenario data table of a multimedia program available in a multimedia-on-demand system according to a second illustrative embodiment of the invention. In Fig. 16, the scenario

data table contains a record for each of the multimedia objects used in the multimedia program for which the scenario data table is intended. Each record of the scenario data table comprises the fields of the object ID, the kind of the object, the display position on a screen, the display size, the presentation start time and the presentation end time. For the sake of better understanding, in the presentation start and end time fields, there is included corresponding value of the scenario time counter 501, Ct. In this specific example, the frame rate of the video objects is assumed to be 30 frames per second.

In order to simplify the operation, it is preferable to create an active object table as shown in Fig. 17 from the scenario data table. In Fig. 17, all of the Ct values found in the presentation start and end time fields of the scenario data table are listed in the ascending order in the first column or fields of the event list table. For each of the listed Ct values, there are listed, in the second field, the object IDs of multimedia objects the presentation of which is started or ongoing at the Ct value. However, each second field does not include the object the presentation of which ends at the Ct values.

Fig. 18 is a flowchart showing an operation executed by the controller 50 of the client terminal 3 under the control of an interrupt subroutine called from a main program in response to an interrupt caused by the user at the client terminal 3 pressing one of the presentation control buttons of Fig. 3 after specifying one of the available multimedia programs stored in the mass storage 20. Since the operation 220 of Fig. 18 is very similarly to that of Fig. 6, only the difference between them will be described in the following.

If JB, JF or HS command is detected in step 124, then instead of executing a JB play step 126, a JF play step 128 or a HS play step 130, the controller 50 sets the register 501 value Ct to Ct-Cj, Ct+Cj or 0 in a JB step

240, a JF step 242 or a HS step 244, respectively; and returns to the main program to resumes the normal play operation of the current program from the register 501.

In step 250 of the normal play operation comprising steps 250, 152 and 154, the controller 50 presents relevant object(s) referring to the active object table of Fig. 17. Specifically, if the current value Ct is found in any Ct field of the table, the controller 50 continues the presentation of the object(s) which is (or are) listed in both the current record whose Ct field contains the current Ct value and the just above records in the table; ceases the presentation of the object(s) which is (or are) found in the just above record but not found in the current record, and starts the presentation of the object(s) which first appears (or appear) in the current record. If the current value Ct is not found in any Ct field of the active object table, the controller 50 has only to repeat the same operation as executed for the last Ct value.

in a manner well known in the art. In this case, if a video frame is to be displayed, the controller 50 only uses basic data for the frame.

After step 137, 140, 142 or 144, the controller 50 makes a test in step 238 to see if a video object exists in the record whose Ct value filed contains a largest value not exceeding the value of the scenario time register 501, Ct. If so, the controller 50 performs the image enhancing operation for the frame identified by the current register 501 value Ct minus the register 501 value of the presentation start time SCt of the video object in step 139. This is because the current register value Ct equals the sum of the presentation start time Ct value SCt and the frame number of the video object.

After step 139, the controller 50 ends the operation 220. If the test result is NO in step 238, then the controller 50 ends the operation 220.

As described above, the image enhancing operation of step 139

enhances the picture quality of the frame to be displayed after the execution of a stop command or the execution of a JF, JB or HS command issued during a stop state.

It should be noted that the image enhancing operation may be performed for a plurality of frames beginning the frame identified by the value of Ct – SCt.

### Embodiment III

According to a third illustrative embodiment of the invention, a multimedia-on-demand system adds detailed information to (or enhances the quality of) each of variable-quality objects during a stop period in a manner as illustrated by a part labeled “QUALITY ENHANCING OPERATION” in Fig. 21. A variable-quality object is a multimedia object that comprises a plurality of detail levels of data and that permits an enhancement of the presentation quality by adding a higher detail level of data. The above-mentioned progressive JPEG video is one of such variable-quality objects. Fig. 19 is a diagram showing examples of variable-quality objects. In Fig. 19, still pictures A, B, C and D are variable in the display quality according to the difference data levels used for presentation. Also, the text object of Fig. 19 is said to be a variable –quality object since the text object comprises a plurality of detail levels of data.

Also, the client terminal of the multimedia-on-demand system tries to collect as much object data as possible in advance during a stop period so that a random access operation such as a JF operation can be promptly executed. This collection operation is shown by a part labeled “PRELOAD OPERATION” again in Fig. 21.

Fig. 22 is a flowchart showing an operation of an interrupt subroutine called in response to a pressing of one of the presentation control buttons

of Fig. 3 according to the third embodiment of the invention. The interrupt subroutine 230 is identical to that of Fig. 18 except that after step 137, the controller 50 executes steps 260 and 270 instead of proceeding to step 238.

In step 260, the controller 50 performs an image quality enhancing operation for at least one frame beginning the frame identified by the value of Ct - SCt for each of the active variable-quality objects. For this purpose, it is preferable to add an field 265 for containing a variable-quality flag indicative of whether the objet is variable in presentation quality or a loading priority code indicative of the priority order of the object in a load operation as shown in Fig. 23. If there are a plurality of active objects with an identical priority code, the controller 50 preferably processes the objects in order of presentation.

Also, it is preferable to keep a load flag for each object as shown in Fig. 24. The load flag for an object indicates whether the basic data of the object has been loaded or not. The load flags are all reset in an initial operation.

In step 270, the controller 50 preferably tries to load basic data of as many object to be subsequently presented as possible in advance. In order to distinguish the loaded object from not-loaded ones, the controller 50 sets the load flag each time the load operation of the basic data of an object has been completed. This enables a quick response in a random access operation such as a fast ford operation.

Many widely different embodiments of the present invention may be constructed without departing from the spirit and scope of the present invention. It should be understood that the present invention is not limited to the specific embodiments described in the specification, except as defined in the appended claims.

WHAT IS CLAIMED IS:

1. A method of presenting, at a client terminal, a video program stored in a server linked with the client terminal via transmission path of a limited transmission band width wherein each frame of the video program comprises  
5 a basic data portion and at least one level of quality supplement data portions, the method comprising the steps, executed by the client terminal, of:

in response to one of play control commands from a user, determining a start position in said video program according to said one of said play control command, said play control command including a play, a stop, a head search,  
10 a jump forward and a jump backward command;

in response to said play command from the user, obtaining and using said basic data portions for playing said video program;

in response to said stop command, obtaining and using said at least one level of quality supplement data portions of a last displayed frame for  
15 displaying a quality-enhanced version of said last displayed frame.

2. A method as defined in claim 1, further comprising the step of, in response to one of said head search, said jump forward and said jump backward commands, for obtaining and using said at least one level of quality  
20 supplement data portions of a last displayed frame for displaying a quality-enhanced version of said last displayed frame.

3. A method as defined in claim 1, further comprising the steps, executed by said server, of:

25 storing said basic data portions on a tape recording medium; and

storing each level of said at least one level of said quality supplement data portions on a different tape recording medium.



4. A method as defined claim 3, further comprising the steps,  
executed by said server, of:

rotating all of said recording media synchronously in any of a play, a  
5 head search, a jump forward and a jump backward operation; and  
in response to a quality supplement data request from said client  
terminal, reading said at least one level of quality supplement data portions of  
a last displayed frame by rotating said different recording tape media one by  
one.

10 5. A method as defined in claim 1, further comprising the steps,  
executed by said server, of:

storing said basic data portions on a first tape recording medium; and  
storing said at least one level of said quality supplement data  
15 portions on a second tape recording medium.

6. A method as defined claim 5, further comprising the steps,  
executed by said server, of:

rotating both of said first and second recording media synchronously  
20 in any of a play, a head search, a jump forward and a jump backward  
operation; and

in response to a quality supplement data request from said client  
terminal, reading said at least one level of quality supplement data portions of  
a last displayed frame by rotating said second recording tape media.

25 7. A method as defined in claim 1, further comprising the steps,  
executed by said server, of:

storing said basic data portions and said at least one level of said quality supplement data portions on two distinct areas of a single recording media, said quality supplement data portions for each frame having a constant data quantity; and

5           in response to a quality supplement data request for a specified frame from said client terminal, reading said quality supplement data portions for said specified frame by means of a rule-of three sum.

8. A method as defined in claim 1, further comprising the steps,  
10       executed by said server, of:

storing said basic data portions and said at least one level of said quality supplement data portions on two distinct areas of a single recording media;

15       keeping a start address of said quality supplement data portions for each frame;

in response to a quality supplement data request for a specified frame from said client terminal, reading said quality supplement data portions for said specified frame by using said start address of said specified frame.

20       9. A method as defined in claim 1, further comprising the steps, executed by said server, of:

storing said basic data portion for each frame and said at least one level of said quality supplement data portions for said frame just following said basic data portion alternately in a successive area on a single recording  
25       media;

in response to a request for basic data for said play command, reading only said basic data portions by skipping said quality supplement data

portions; and

after a stop operation responsive to a stop request, reading said at least one level of said quality supplement data portions just following the stopped position.

5

10. A method as defined in claim 1, wherein each frame of said video program has been coded according to a coding standard, said video program comprising independent frames that can be decoded alone without a need of other frame data and difference frames that can not be decoded without other frame data, and wherein said using includes passing to a decoder.

11. A method as defined in claim 10, wherein said coding standard is an H. 263 standard and wherein said using includes passing to an H. 263 decoder.

12. A method as defined in claim 10, wherein said coding standard is an MPEG standard and wherein said using includes passing to an MPEG decoder.

13. A method of presenting, at a client terminal, a multimedia program stored in a server wherein the multimedia program includes a video object, each frame of the video object comprising a basic data portion and at least one level of detailed data portions, the method comprising the steps of:

in response to one of play control commands from a user, determining a time count in said multimedia program according to said one of said play control command, said play control command including a play, a stop, a head search, a jump forward and a jump backward command;

in response to one of said head search, said jump forward and said jump backward commands issued during a stop period, determining whether there is a video object to be displayed at said time count in said multimedia program; and

5 in the event there is said video object to be displayed at said time count in said multimedia program, obtaining said at least one level of quality supplement data portions for a first frame to be displayed in a next play operation for displaying a quality-enhanced version of said first frame to be displayed.

10 14. A method as defined in claim 13, further comprising the steps, executed by said client terminal, of:

in response to said stop command, determining whether there is a video object to be displayed at said time count in said multimedia program; and

15 in the event there is said video object to be displayed at said time count, obtaining said at least one level of quality supplement data portions for a first frame to be displayed in a next play operation for displaying a quality-enhanced version of said first frame to be displayed.

20 15. A method as defined in claim 13, further comprising the steps, executed by said client terminal, of

25 in response to said stop command, making a test to see if there is multimedia objects which are other than video objects and each comprise basic data and quality supplement data and which are to be displayed at said time count in said multimedia program; and

for each of said found multimedia objects, obtaining said quality

supplement data for displaying a quality-enhanced version of said each object.

16. A method as defined in claim 13, further comprising the steps,  
executed by said client terminal, of

5 in response to said stop command, making a test to see if there is  
multimedia objects which are other than video objects and each comprise basic  
data and quality supplement data and which are to be displayed later; and  
for each of said found multimedia objects, obtaining said basic data in  
advance.

10 17. A method as defined in claim 15, further comprising the steps,  
executed by said client terminal, of

15 in response to said stop command, making a test to see if there is  
multimedia objects which are other than video objects and each comprise basic  
data and quality supplement data and which are to be displayed later; and  
for each of said found multimedia objects, obtaining said basic data in  
advance.

20 18. A terminal for presenting a video program stored in a remote  
server connected therewith via band-limited transmission path wherein each  
frame of the video program comprises a basic data portion and at least one  
level of quality supplement data portions, the terminal comprising;

25 means, responsive to one of play control commands from a user, for  
determining a start position in said video program according to said one of  
said play control command, said play control command including a play, a stop,  
a head search, a jump forward and a jump backward command;

means, responsive to said play command from the user, for obtaining

and using said basic data portions for playing said video program;

means, responsive to said stop command, for obtaining and using said at least one level of quality supplement data portions of a last displayed frame for displaying a quality-enhanced version of said last displayed frame.

5

19. A terminal as defined in claim 18, further comprising means, responsive to one of said head search, said jump forward and said jump backward commands, for obtaining and using said at least one level of quality supplement data portions of a last displayed frame for displaying a quality-enhanced version of said last displayed frame.

10

20. A terminal of presenting a multimedia program stored in a remote server linked therewith via a band-limited transmission path wherein the multimedia program includes a video object, each frame of the video object comprising a basic data portion and at least one level of detailed data portions, the terminal comprising:

15

means, responsive to one of play control commands from a user, for determining a time count in said multimedia program according to said one of said play control command, said play control command including a play, a stop, a head search, a jump forward and a jump backward command;

20

means, responsive to one of said head search, said jump forward and said jump backward commands issued during a stop period, for determining whether there is a video object to be displayed at said time count in said multimedia program; and

25

means, operative in the event there is said video object to be displayed at said time count in said multimedia program, for obtaining said at least one level of quality supplement data portions for a first frame to be

displayed in a next play operation for displaying a quality-enhanced version of said first frame to be displayed.

21. A terminal as defined in claim 20, further comprising:

5 means, responsive to said stop command, for determining whether there is a video object to be displayed at said time count in said multimedia program; and

means, operative in the event there is said video object to be displayed at said time count, for obtaining said at least one level of quality supplement data portions for a first frame to be displayed in a next play operation for displaying a quality-enhanced version of said first frame to be displayed.

22. A terminal as defined in claim 20, further comprising:

15 means, responsive to said stop command, for finding multimedia objects which are other than video objects and each comprise basic data and quality supplement data and which are to be displayed at said time count in said multimedia program; and

means, operative for each of said found multimedia objects, for  
20 obtaining said quality supplement data for displaying a quality-enhanced version of said each object.

23. A terminal as defined in claim 20, further comprising:

means, response to said stop command, for finding multimedia  
25 objects which are other than video objects and each comprise basic data and quality supplement data and which are to be displayed later; and

means, operative for each of said found multimedia objects, for

obtaining said basic data in advance.

24. A terminal as defined in claim 22, further comprising:

means, responsive to said stop command, for finding multimedia

5 objects which are other than video objects and each comprise basic data and quality supplement data and which are to be displayed later; and

means, operative for each of said found multimedia objects, for obtaining said basic data in advance.

10 25. A server for serving a video program to client terminals linked via band-limited transmission path, each frame of the video program comprising a basic data portion and at least one level of quality supplement data portion, the server comprising:

15 means for storing said basic data portions on a tape recording medium; and

means for storing each level of said at least one level of said quality supplement data portions on a different tape recording medium.

26. A server as defined in claim 25, further comprising:

20 means for rotating all of said recording media synchronously in any of a play, a head search, a jump forward and a jump backward operation; and

25 means, responsive to a quality supplement data request from said client terminal, for reading said at least one level of quality supplement data portions of a last displayed frame by rotating said different recording tape media one by one.

27. A server for serving a video program to client terminals linked via



band-limited transmission path, each frame of the video program comprising a basic data portion and at least one level of quality supplement data portion, the server comprising:

storing said basic data portions on a first tape recording medium; and

storing said at least one level of said quality supplement data portions on a second tape recording medium.

28. A server as defined in claim 27, further comprising:

means for rotating both of said first and second recording media synchronously in any of a play, a head search, a jump forward and a jump backward operation; and

means, responsive to a quality supplement data request from said client terminal, for reading said at least one level of quality supplement data portions of a last displayed frame by rotating said second recording tape media.

29. A server for serving a video program to client terminals linked via band-limited transmission path, each frame of the video program comprising a basic data portion and at least one level of quality supplement data portion, the server comprising:

means for storing said basic data portions and said at least one level of said quality supplement data portions on two distinct areas of a single recording media, said quality supplement data portions for each frame having a constant data quantity; and

means, response to a quality supplement data request for a specified frame from said client terminal, for reading said quality supplement data portions for said specified frame by means of a rule-of three sum.

30. A server for serving a video program to client terminals linked via band-limited transmission path, each frame of the video program comprising a basic data portion and at least one level of quality supplement data portion,

5 the server comprising:

means for storing said basic data portions and said at least one level of said quality supplement data portions on two distinct areas of a single recording media;

means for keeping a start address of said quality supplement data portions for each frame;

means, responsive to a quality supplement data request for a specified frame from said client terminal, for reading said quality supplement data portions for said specified frame by using said start address of said specified frame.

31. A server for serving a video program to client terminals linked via band-limited transmission path, each frame of the video program comprising a basic data portion and at least one level of quality supplement data portion, the server comprising:

means for storing said basic data portion for each frame and said at least one level of said quality supplement data portions for said frame just following said basic data portion alternately in a successive area on a single recording media;

means, responsive to a request for basic data for said play command, for reading only said basic data portions by skipping said quality supplement data portions; and

means, operative after a stop operation responsive to a stop request,

for reading said at least one level of said quality supplement data portions just following the stopped position.

32. A terminal as defined in claim 18, wherein each frame of said  
5 video program has been coded according to a coding standard, said video  
program comprising independent frames that can be decoded alone without a  
need of other frame data and difference frames that can not be decoded  
without other frame data, and wherein said obtaining and using means each  
includes means for passing to a decoder.

10 33. A terminal as defined in claim 32, wherein said coding standard is  
an H. 263 standard and wherein said obtaining and using means each include  
means for passing to an H. 263 decoder.

15 34. A terminal as defined in claim 32, wherein said coding standard is  
an MPEG standard and wherein said obtaining and using means each include  
means for passing to an MPEG decoder.

## ABSTRACT OF THE DISCLOSURE

A method of presenting, at a client terminal, a video program stored in a server linked with the client terminal via transmission path of a limited transmission band width. Each frame of the video program comprises a basic data portion and at least one level of quality supplement data portions. In the method, in response to one of play control commands from a user, the client terminal determines a start position in the video program according to the issued play control command. The play control commands includes a play, a stop, a head search, a jump forward and a jump backward command. In response to the issued play command, the terminal obtains and uses the basic data portions for playing the video program. In response to the stop command, the terminal obtains the quality supplement data portions for the last displayed frame and uses them for displaying a quality-enhanced version of the last displayed frame.

1/15

FIG. 1

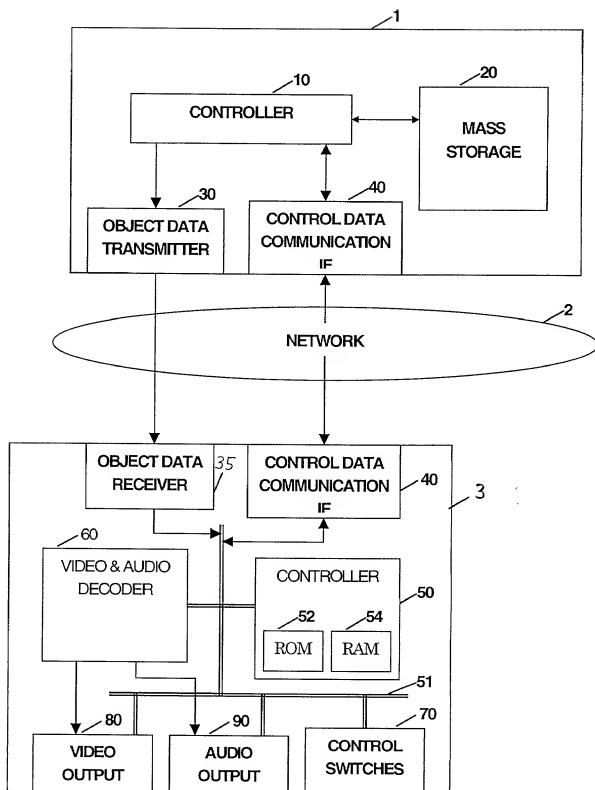


FIG. 2

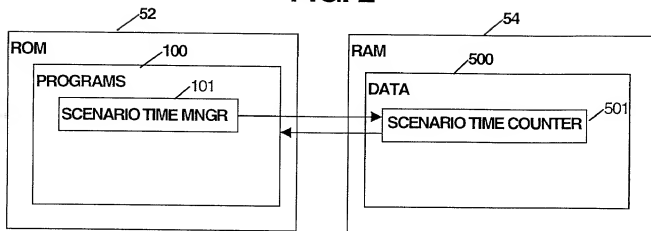


FIG. 3

CONTROL SWITCHES

70




FIG. 4

OPERATED SWITCHES (or ISSUED COMMAND)	THE VALUE ( $C_t$ ) OF SCENARIO TIME COUNTER
PLAY	$C_t + 1$ FOR EVERY FRAME PERIOD $T$ DURING EXECUTION
JUMP FORWARD (JF)	$C_t + C_j$ AFTER THE COMMAND EXECUTION
JUMP BACKWARD (JB)	$C_t - C_j$ AFTER THE COMMAND EXECUTION
HEAD SEARCH (HS)	0 AFTER THE COMMAND EXECUTION
STOP	$C_t$ AFTER THE COMMAND EXECUTION

( $C_j$  IS A PREDETERMINED LEAP (OR JUMP) DISTANCE FOR FORWARD AND BACKWARD OPERATIONS)

FIG. 5

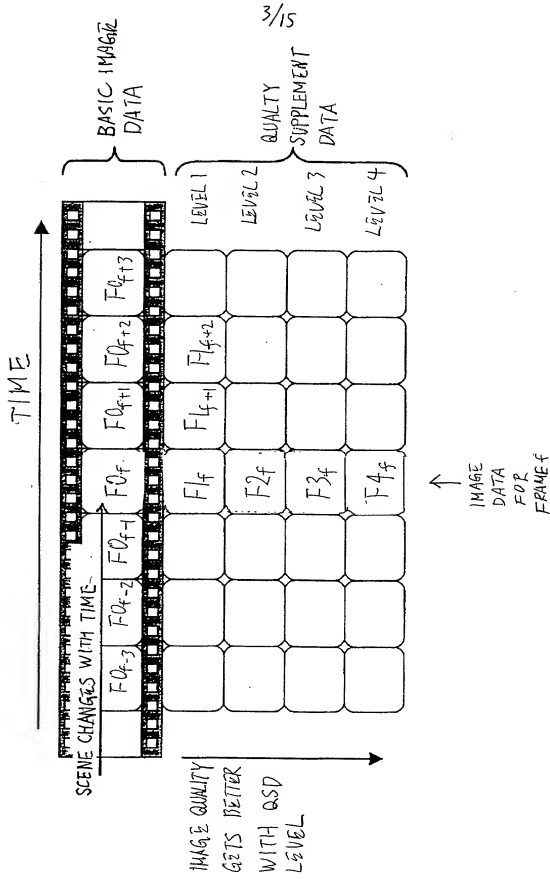


FIG. 6


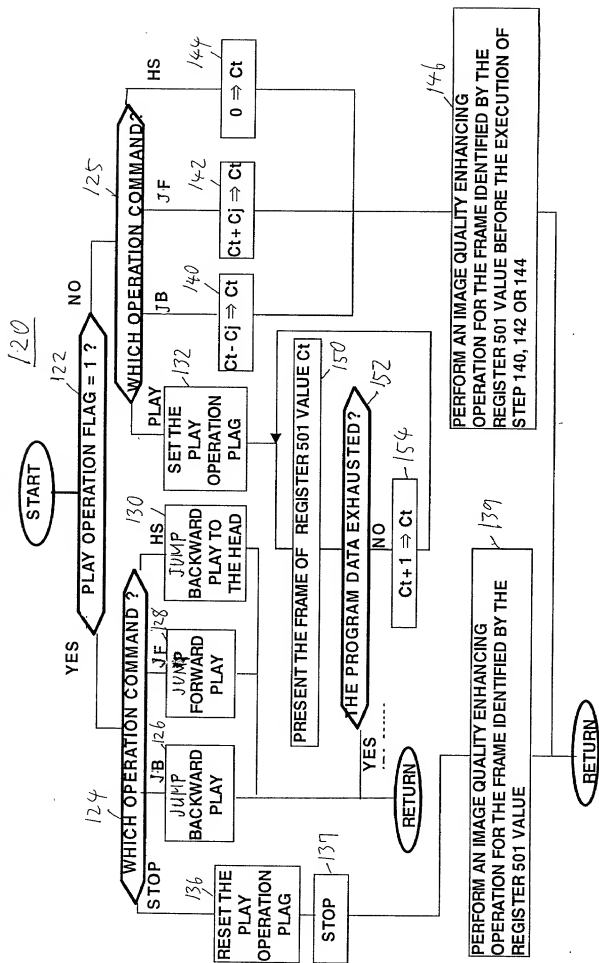




FIG. 8

20b



20a

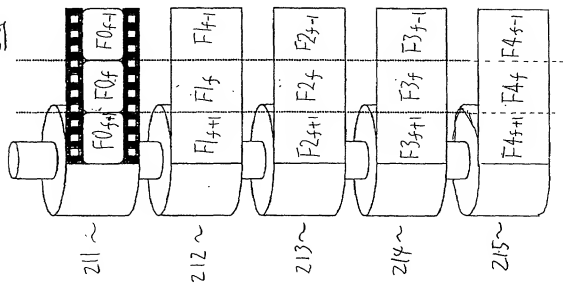


FIG. 9 <sup>6/15</sup>

20C

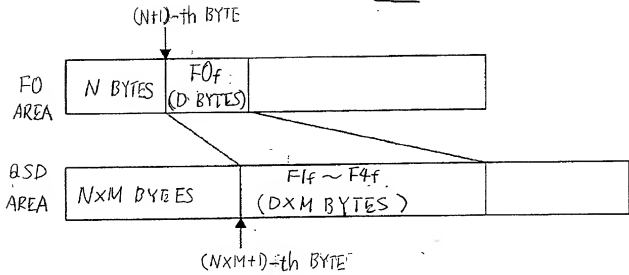


FIG. 11




FIG. 10

20D

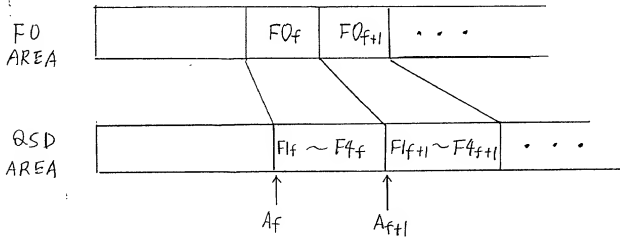


FIG. 12

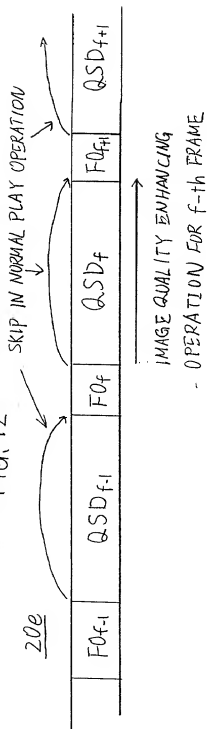


FIG. 13


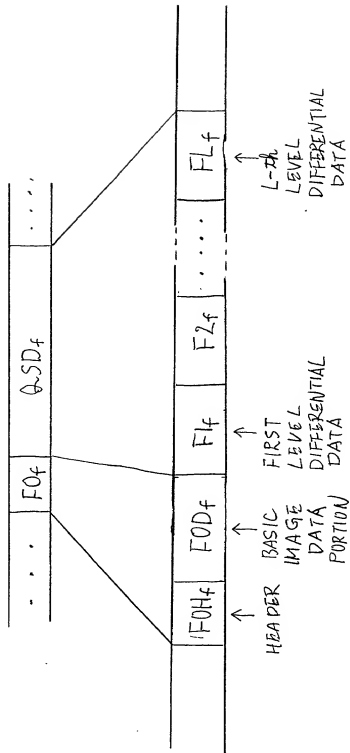


FIG. 14

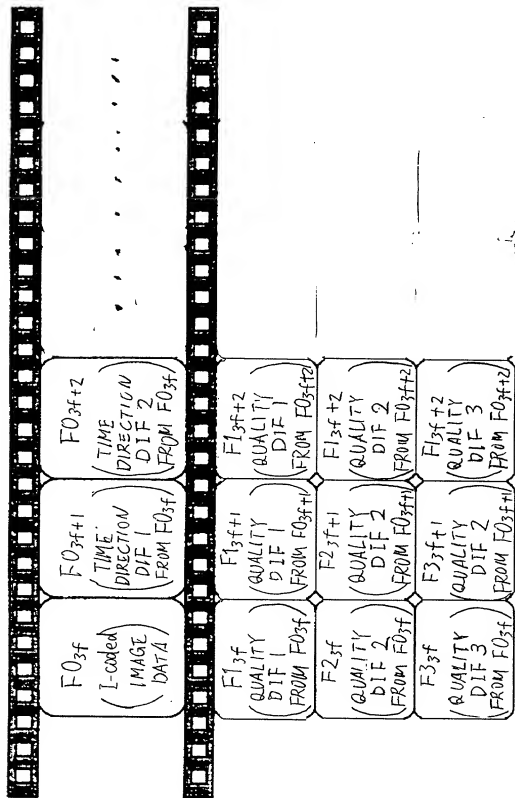

8/15

9/15

FIG. 15

600

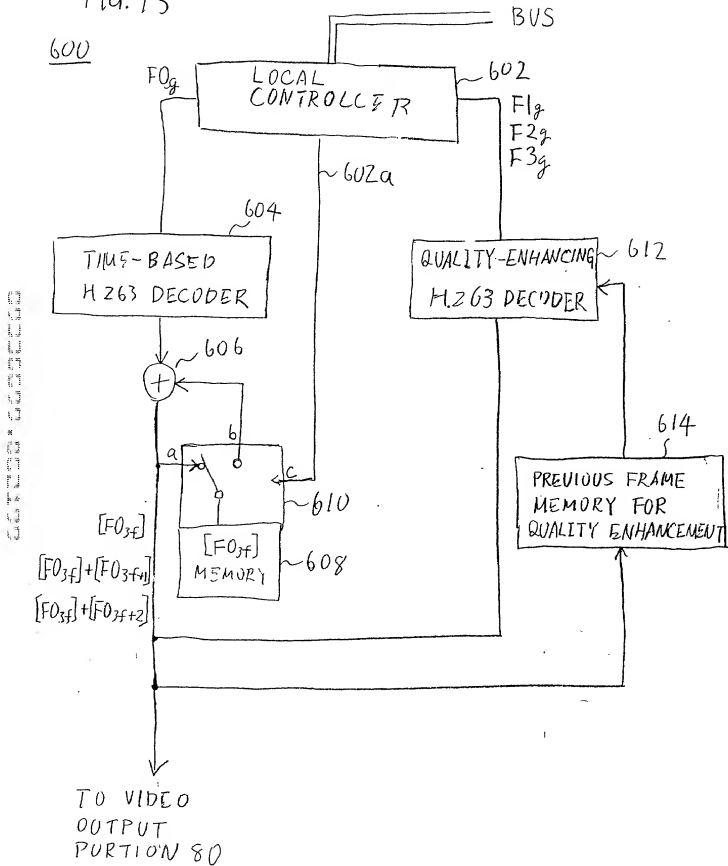


FIG. 16

SCENARIO DATA TABLE


OBJECT ID	KIND OF OBJECT	DISPLAY POSITION	DISPLAY SIZE	PRESENTATION START TIME (Ct VALUE = Sct)	PRESENTATION END TIME (Ct VALUE)
001	STILL	X=0, Y=0	800x600	0:00 (0)	3:25 (369000)
002	VIDEO	X=100, Y=100	400x300	0:00 (0)	3:25 (369000)
003	TEXT	X=20, Y=20	400x50	0:00 (0)	1:00 (108000)
004	TEXT	X=200, Y=500	500x50	1:00 (108000)	3:00 (324000)
005	STILL	X=600, Y=150	150x200	1:00 (108000)	2:00 (216000)
006	STILL	X=600, Y=450	100x100	2:30 (270000)	3:15 (351000)

FIG. 17

ACTIVE OBJECT TABLE


Ct VALUE	ACTIVE OBJECTS
0	001, 002, 003
108000	001, 002, 004, 005
216000	001, 002, 004
270000	001, 002, 004, 006
324000	001, 002, 006
351000	001, 002
369000	

FIG. 18

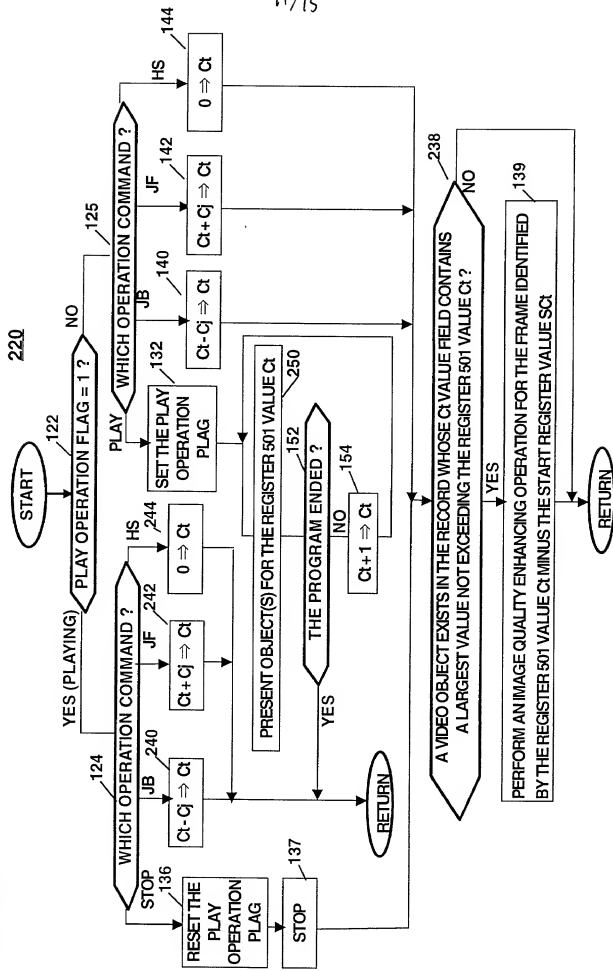

# FIG. 19

OBJECT DATA  
TO BE TRANSMITTED

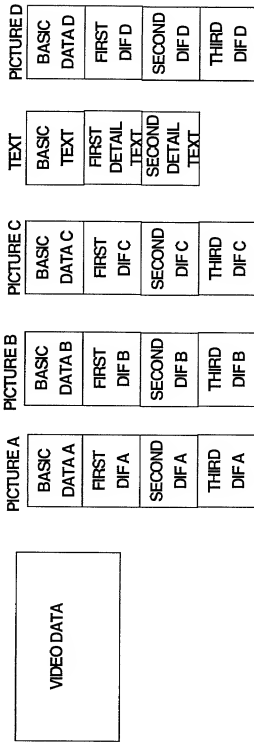

# FIG. 20

SCENARIO

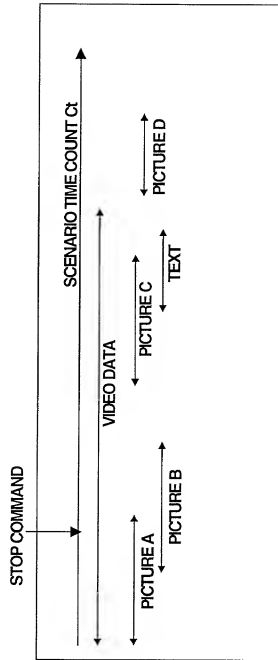
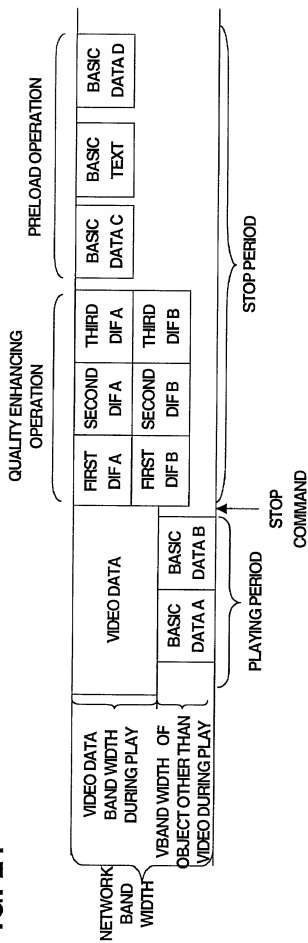




FIG. 21



**FIG. 22**

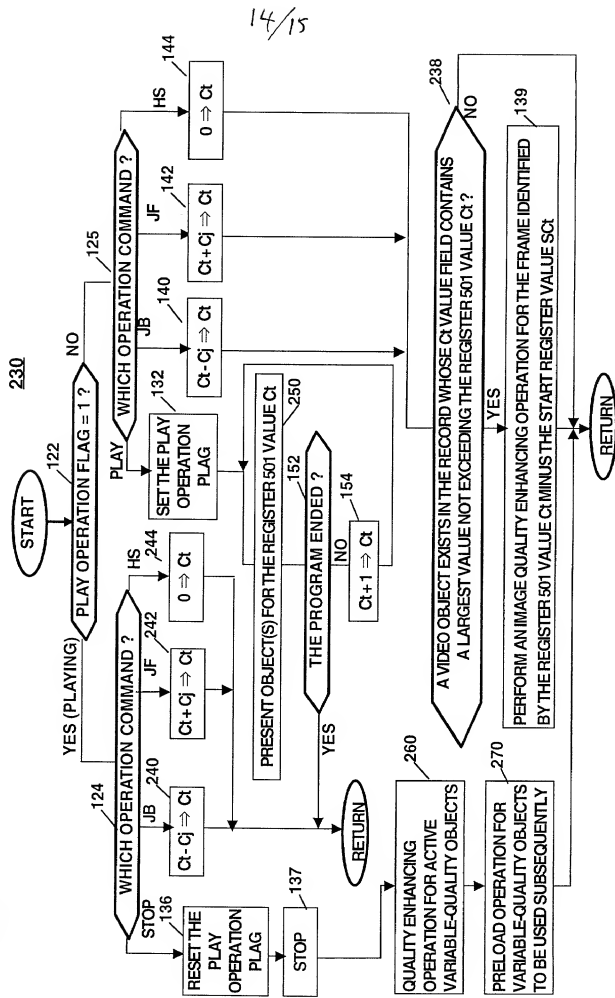


FIG. 23

OBJECT ID
KIND OF OBJECT
DISPLAY POSITION
DISPLAY SIZE
PRESENTATION START TIME
PRESENTATION END TIME
LOADING PRIORITY CODE (or VARIABLE-QUALITY FLAG)

265

FIG. 24

OBJECT ID	LOAD FLAG
-----------	-----------

Docket No.:

## **DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought on the invention entitled

CLIENT/SERVER MULTIMEDIA PRESENTATION SYSTEM

the specification of which

☒ is attached hereto      ☐ was filed on      as Application Serial No.      and was amended on      (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is known to me to be material to patentability in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

**Prior Foreign Application(s):**

<u>Number</u>	<u>Country</u>	<u>Day/Month/Year filed</u>
10-180269	Japan	June 26, 1998

**Priority Claimed**

<u>Yes</u>	<u>No</u>
X	

I hereby authorize the U. S. attorneys and agents named herein to accept and follow instructions from **PATENT DEVELOPMENT INTERNATIONAL, INC. or from its employees** as to any actions to be taken in the Patent and Trademark Office regarding this application without direct communication between the U. S. attorney(s) and the undersigned. In the event of a change in the person(s) from whom instructions may be taken, the U. S. attorney(s) will be so notified by the undersigned.

I hereby claim the benefit under 35 USC §119(e) of any United States provisional application(s) listed below.

**Prior Provisional Application(s):**

<u>Application Number</u>	<u>Filing Date</u>
---------------------------	--------------------

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or Section 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

**Prior U. S. Application(s):**

<u>Serial No.</u>	<u>Filing Date</u>	<u>Status: Patented, Pending, Abandoned</u>
-------------------	--------------------	---

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) and/or agent(s): Allan M. Lowe, Reg. No. 19,641; Israel Gopstein, Reg. No. 27,333; Benjamin J. Hauptman, Reg. No. 29,310; Kenneth M. Berner, Reg. No. 37,093 and Michael G. Gilman, Reg. No. 19,114. all of

LOWE HAUPTMAN GOPSTEIN GILMAN & BERNER, LLP  
99 Canal Center Plaza, Suite 420  
Alexandria, Virginia 22314

with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and all future correspondence should be addressed to them.

\*\*\*\*\*

Full name of sole or first inventor: Kensuke Maruya  
Inventor's signature: *Kensuke Maruya* Date: May 28, 1999  
Residence: Tokyo, Japan  
Citizenship: Japanese  
Post Office Address: 5-20-1-203, Nagayama, Tama-shi, Tokyo 206-0025 Japan

\*\*\*\*\*

Full name of second joint inventor: Toshio Oka  
Inventor's signature: *Toshio Oka* Date: May 28, 1999  
Residence: Yokohama, Japan  
Citizenship: Japanese  
Post Office Address: 2432-3, Nase-cho, Totsuka-ku, Yokohama 245-0051 Japan

\*\*\*\*\*

Full name of third joint inventor: Akino Inoue  
Inventor's signature: *Akino Inoue* Date: May 28, 1999  
Residence: Tokyo, Japan  
Citizenship: Japanese  
Post Office Address: 5-13-8-405, Kami Meguro, Meguro-ku, Tokyo 153-0051 Japan

\*\*\*\*\*

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of :  
Kensuke MARUYA et al. :  
Serial No. : Group Art Unit:  
Filed: June 21, 1999 : Examiner:  
For: CLIENT/SERVER MULTIMEDIA PRESENTATION SYSTEM

CORRESPONDENCE ADDRESS CHANGE

Assistant Commissioner of Patents  
Washington, D. C. 20231

Sir:

Please forward all future correspondence to the below-listed address:

Israel Gopstein  
LOWE HAUPTMAN GOPSTEIN GILMAN & BERNER, LLP  
1700 Diagonal Road, Suite 310  
Alexandria, Virginia 22314

Respectfully submitted,

LOWE HAUPTMAN GOPSTEIN GILMAN & BERNER, LLP



Israel Gopstein  
Registration No. 27,333

1700 Diagonal Road, Suite 310  
Alexandria, Virginia 22314  
(703) 684-1111 IG:tmf  
**Date:** June 21, 1999  
**Facsimile:** 703-518-5499